

## PortaPath Information Sheet

**PortaPath creates strong, seamless, temporary pedestrian pathways and flooring in marquees and other event venues.**



### PortaPath Specifications

**Material:** High Impact UV protected polypropylene

**Tile Size:** 311mm x 85mm x 16mm

**Weight:** 3.7kg/sq m

**Loading:** 2000kg

**Working Temperature:** -10° C - 40° C

**Fire Rating:** NFP92-501 Espiradiateur Test M4

**Fire Fighting Measures:** water, foam, carbon dioxide, dry powder.

**Sensitization:** Polypropylene is not considered to be a skin or eye sensitizer at room temperature.

**Disposal:** 100% can be recycled.

**Waste Code:** 070213 (waste plastics)  
120105 (plastic shavings / turnings)

### Cleaning

Care should be taken to ensure that the both sides of the tiles are cleaned using cold water and a pressure washer.

### Installing on Grass



It is recommended that grass surfaces be cut short just prior to installation. Grass may be watered before installation but it is recommended that the grass be allowed to dry before deploying PortaPath. Upon removal of PortaPath, simply rake grass to facilitate rapid rebound.

### Installation

PortaPath is designed to be installed over grass, gravel, sand, dirt, and mud. No ground preparation is required for athletic fields or other level and consistent surfaces. It is recommended that a survey of the installation site be done prior to installation of PortaPath. Larger stones, rocks and obstacles should be removed. While PortaPath will span smaller indentations and gradations, it is recommended that large holes be covered or filled with sand to create a more level finished floor.

It is advisable to use rolling carts, pallet jacks and/or forklifts where possible to facilitate rapid placement of material. Specific attention should be paid to site access and strategic placement of material pallets to minimize the distance travelled between material pallets and the installation area.

### Connecting Individual PortaPath Modules

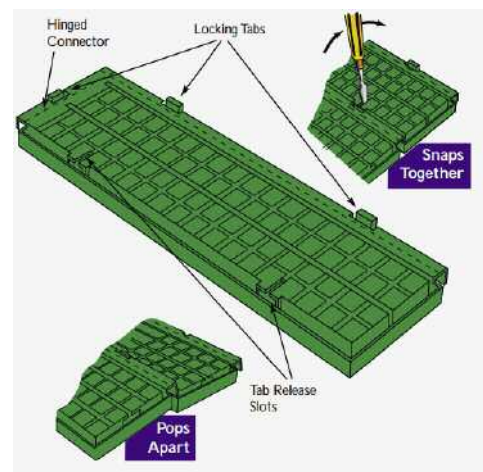

Separation unit can be supplied for dismantling large areas

**[www.all-weatheraccess.co.uk](http://www.all-weatheraccess.co.uk)**

All Weather Access Ltd, County Farm, Dunmow, CM6 1NQ.  
e:info@all-weatheraccess t:01371 700 510 m:07801 751137